

34 Yale Drive, Epping VIC 3076

Pty Ltd


Ph (03) 9408 9907 Email [sales@lockitwell.com.au](mailto:sales@lockitwell.com.au)

[www.lockitwell.com.au](http://www.lockitwell.com.au) for Full Product Information

## “E Series” Elevator

High Strength  
Brass Material

High Quality  
Switch Contacts

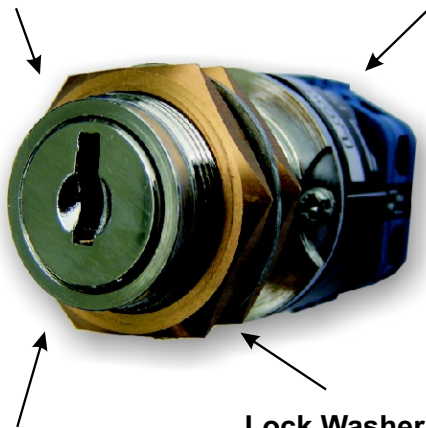


Incorporates YA17, YA17R  
and LW3 Keyways

Lock Washer




Note: Bezel Mount Cutout  
Size = 20.5mm

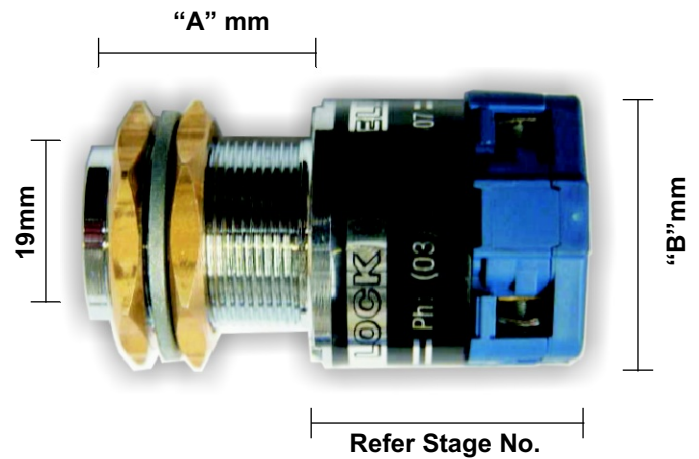

| Lift Mount      | “A”  | Stage |      | “B”  |
|-----------------|------|-------|------|------|
|                 |      | 1     | 2    |      |
| Waffer          | 24mm | -     | -    | -    |
| Bilock          | 29mm | -     | -    | -    |
| Medeco          | 32mm | -     | -    | -    |
| Digit 5 = 5     | -    | 28mm  | 36mm | 33mm |
| Digit 5 = 1,4,7 | -    | 30mm  | 40mm | 43mm |
| Digit 5 = 2     | -    | 34mm  | 47mm | 47mm |

Note: Refer to Switch Circuits for Stage No.

Hi-tech multi  
voltage contacts



The "E" series is primarily designed for use on Lifts and elevators. It meets the strict elevator regulations and can be supplied to suit standard or unique lift key codes. Circuits to suit most lift manufacturers are available off the shelf.


Specialised Security Products

Patented & Registered Designs

©copyright Lock It Well 2015

E-Series  
2015

## How To Order

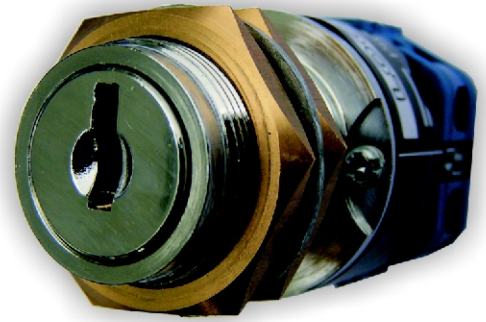

The Example shown is for a E-Series Wafer keyed, Lift mount, with key removal in 2 positions with a multi-voltage switch.

# EC325120

Digit 1  
"Removable Series"

### Digit 2

#### "Lock Type"

- C Wafer** YA17, LW3
- M Medeco**
- Q Bilock QCC**
- R Wafer Reverse** YA17R
- U Medeco Removable**

### Digit 3

#### "Mounting"



2 Bezel



3 Lift

### Digit 4

#### "Key Removal"

- 1 Position
- 2 Position
- 3 Position

Spring Return=1 Position.  
If Key Captive Required  
Please Indicate Position.

### Digit 5


#### "Electrical Rating"

- 1 - High Voltage**<sup>(Standard)</sup>  
Silver Button Contacts  
AC21A 20Amp  
DC1 24V-20Amp
- 2 - High Voltage/Amps**  
Silver Button Contacts  
AC21A 32Amp  
DC1 24V-25Amp
- 4 - Low Current**<sup>(Low Bounce)</sup>  
Silver H-Bridge Contacts  
AC21A 12V-5Amp  
DC1 12V-3Amp
- 5 - Multi Volt**<sup>(Standard Small)</sup>  
Special Multi-Voltage Contacts  
AC21A -10Amp  
DC1 24V-6Amp
- 7 - PLC Data**<sup>(Low Bounce)</sup>  
Gold H-Bridge Contacts  
AC21A 12V-2Amp  
DC1 12V-1.5Amp


### Digit 6,7&8

#### "Switch Circuits"


Note: Please refer to the relevant circuit brochure attached or available online at [www.lockitwell.com.au](http://www.lockitwell.com.au) under the downloads section of the lift switches




Two Position  
Circuit Brochure ID: LCIRC4



Three Position  
Circuit Brochure ID: LCIRC5



Two Position with  
Spring Return  
Circuit Brochure ID: LCIRC6



Spring Return One Way  
Circuit Brochure ID: LCIRC7

### \*\*Note\*\*

Almost any circuit can be produced on request

## Studless Surrounds Types

Available in Silver, Red and Black as Standard



### Large Studless

LIW Order Code "D-Studless"  
Diameter = 40mm / Hole Size = 36mm  
Order with Lift Mounting Only




### Medium Studless

LIW Order Code "O-Studless"  
Diameter = 36mm / Hole Size = 33mm  
Order with Lift Mounting Only



### Small Studless

LIW Order Code "S-Studless"  
Diameter = 31mm / Hole Size = 28mm  
Order with Lift Mounting Only

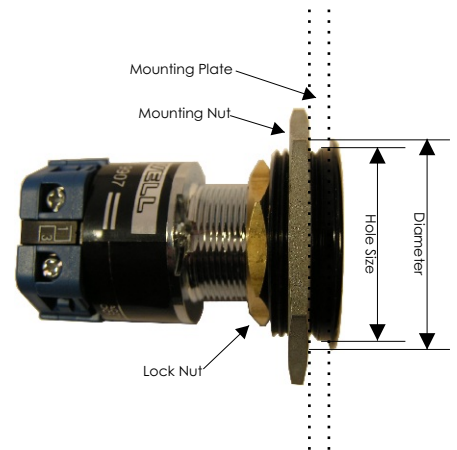

Others colours available on request: