
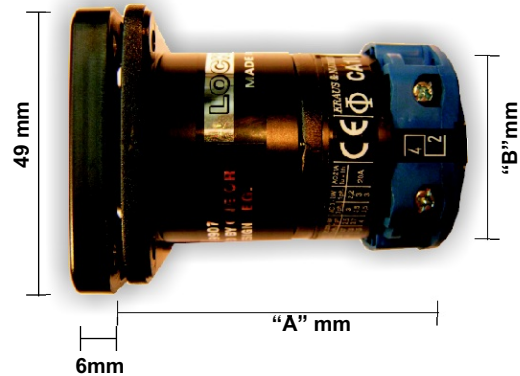


34 Yale Drive, Epping VIC 3076  
Ph (03) 9408 9907 Fax (03) 9408 9920

Pty Ltd

[www.lockitwell.com.au](http://www.lockitwell.com.au) for Full Product Information

## “R Series” Removal Cylinder

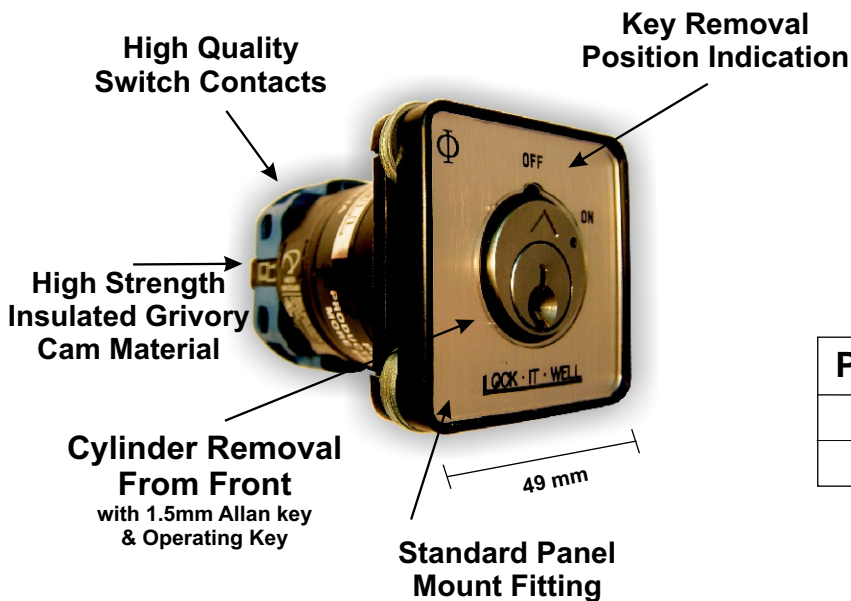

Panel Mount	“A” Stage		“B”
	1	2	
Digit 5 = 1,4,7	61mm	70mm	43mm
Digit 5 = 2	65mm	77mm	47mm

Max Material Thickness 4mm

### Optional Mounting Types




Surface Mount Box  
LIW Order Code “KEJB1”



Water Resistant Box  
LIW Order Code “KEWP1”



Stainless Steel  
LIW Order Code “PZ11”

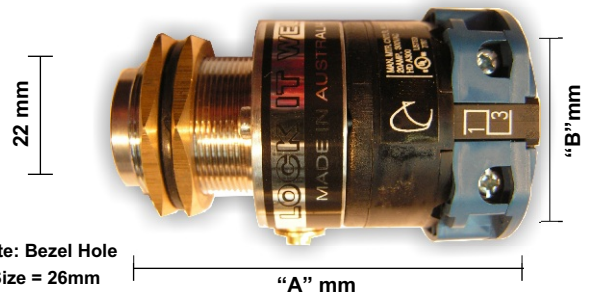

Note: Bezel Hole  
Size = 26mm

Lift Mount	“A” Stage		“B”
	1	2	
Digit 5 = 1,4,7	71mm	81mm	43mm
Digit 5 = 2	75mm	88mm	47mm

Thread Max Material Thickness 22mm  
Cylinder Max Material Thickness 2.5mm

The “R” series uses a unique removable cylinder enabling convenient master keying and key recombination of rental properties. The key may be removed or held captive in any switched position. This series is available in a variety of mounting types including panel, lift, bezel and wall plate. It is also available in a wide range of switching configurations.

### Features

- Incorporates specialised lock cylinders for key removable in multiple positions.
- Cylinder removable from front without risk of the switch falling apart.
- May be master keyed into most common lock brands and high security lock systems.
- Electrical isolated cylinder for added safety

### Specialised Security Products

Patented & Registered Designs

©copyright Lock It Well 2015

R-Series  
2015

## How To Order



The Example shown is for a R-Series Lockwood 6-pin inline, Panel mount, with key removal in 2 positions at 20 amp switch.

# RL121003

Digit 1  
"Removable Series"

### Digit 2 "Lock Type"

- A Astra
- B Bilock
- D Abloy(Protec & Disklock)
- E Efcó
- G Kaba Modular
- H Kaba Gege
- K Kaba Quattro (Old Size Core)
- L Lockwood** (6-Pin Inline)
- P Binary Plus
- S Schlage
- T Lockwood Twin
- V Lockwood V7
- W Evva
- O Other

### Digit 3 "Mounting"



1 Panel



2 Bezel



3 Lift

### Digit 4 "Key Removal"

- 1 Position
- 2 Position
- 3 Position
- 4 Position
- 5 Position
- 6 Position


Spring Return=1 Position.  
Note: Specify if Captive Positions are Required.

### Digit 5 "Electrical Rating"

- 1 -Mains Voltage(Standard)  
Silver Button Contacts  
AC21A 20Amp  
DC1 24V-20Amp
- 2 -Mains Voltage/Amps  
Silver Button Contacts  
AC21A 32Amp  
DC1 24V-25Amp
- 4 -Low Current(Low Bounce)  
Silver H-Bridge Contacts  
AC21A 12V-5Amp  
DC1 12V-3Amp
- 7 -PLC Data(Low Bounce)  
Gold H-Bridge Contacts  
AC21A 12V-2Amp  
DC1 12V-1.5Amp


### Digit 6,7&8 "Switch Circuits"

Note: Refer to full switch circuits for other switch configurations

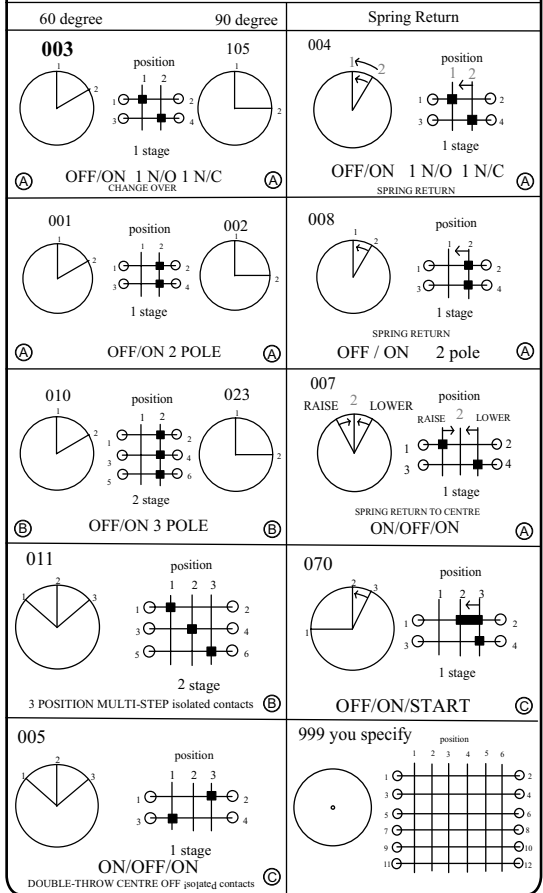

### Engraving

Some switch types have common engraving. If you have special requirements Please show them in the following way at time of order.

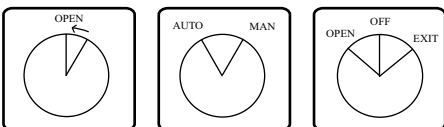

Note: Charges may apply



"R Series"  
Cylinder Cam  
LIW Code "PR05"

### Optional Mounting Types



Surface Box Mounting  
LIW Order Code "KEJB1"  
100mm X 100mm X 100mm  
Order with Panel Mounting Only



Water Resistant Box Mounting  
LIW Order Code "KEWP1"  
100mm X 100mm X 100mm  
Order with Panel Mounting Only



Stainless Steel Mount  
LIW Order Code "PZ11"  
75mm X 115mm  
Order with Panel Mounting Only



Clipsal 2000 Series Wall  
LIW Order Code "EZY WALL"  
75mm X 115mm  
Order with Panel Mounting Only



Flush Fit - Studless  
LIW Order Code "DL Studless"  
Diameter = 40mm Hole Size = 36mm  
Order with Lift Mounting Only