


34 Yale Drive, Epping VIC 3076 Pty Ltd
Ph (03) 9408 9907 Email sales@lockitwell.com.au
www.lockitwell.com.au for Full Product Information

“E Series” Elevator

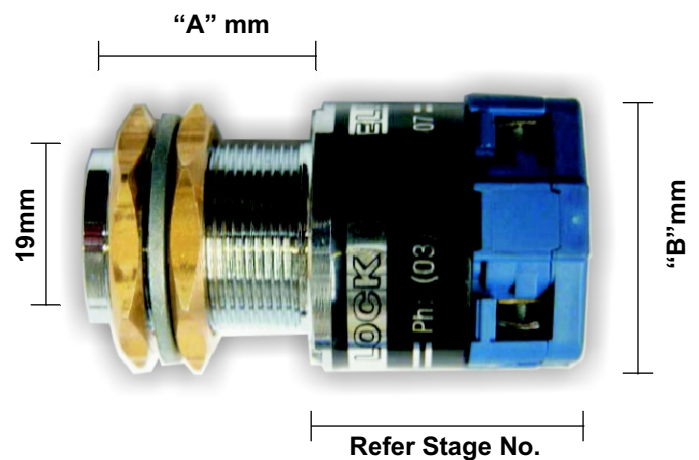


Note: Bezel Mount Cutout
Size = 20.5mm

Lift Mount	“A”	Stage		“B”
		1	2	
Waffer	24mm	-	-	-
Bilock	29mm	-	-	-
Medeco	32mm	-	-	-
Digit 5 = 5	-	28mm	36mm	33mm
Digit 5 = 1,4,7	-	30mm	40mm	43mm
Digit 5 = 2	-	34mm	47mm	47mm

Note: Refer to Switch Circuits for Stage No.

Hi-tech multi
voltage contacts



The "E" series is primarily designed for use on Lifts and elevators. It meets the strict elevator regulations and can be supplied to suit standard or unique lift key codes. Circuits to suit most lift manufacturers are available off the shelf.


Specialised Security Products

Patented & Registered Designs

©copyright Lock It Well 2015

E-Series
2015

How To Order

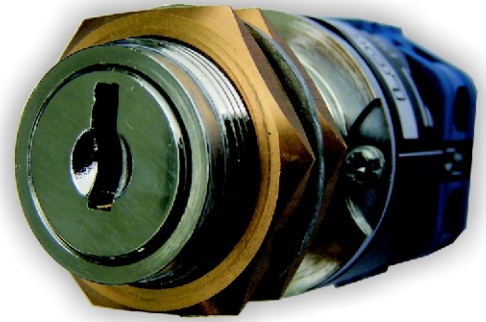

The Example shown is for a E-Series Wafer keyed, Lift mount, with key removal in 2 positions with a multi-voltage switch.


EC325120

Digit 1
"Removable Series"


Digit 2
"Lock Type"

C Wafer YA17, LW3
M Medeco
Q Bilock QCC
R Wafer Reverse YA17R
U Medeco Removable

Digit 3
"Mounting"



2 Bezel



3 Lift

Digit 4
"Key Removal"

1 Position
 2 Position
 3 Position

Spring Return=1 Position.
 If Key Captive Required
 Please Indicate Position.

Digit 5
"Electrical Rating"

1 - High Voltage^(Standard)
 Silver Button Contacts
 AC21A 20Amp
 DC1 24V-20Amp

2 - High Voltage/Amps
 Silver Button Contacts
 AC21A 32Amp
 DC1 24V-25Amp





4 - Low Current^(Low Bounce)
 Silver H-Bridge Contacts
 AC21A 12V-5Amp
 DC1 12V-3Amp

5 - Multi Volt^(Standard Small)
 Special Multi-Voltage Contacts
 AC21A -10Amp
 DC1 24V-6Amp

7 - PLC Data^(Low Bounce)
 Gold H-Bridge Contacts
 AC21A 12V-2Amp
 DC1 12V-1.5Amp

Digit 6,7&8
"Switch Circuits"

Note: Please refer to the relevant circuit brochure attached or available online at www.lockitwell.com.au under the downloads section of the lift switches

 <p>Two Position Circuit Brochure ID: LCIRC4</p>	 <p>Three Position Circuit Brochure ID: LCIRC5</p>
 <p>Two Position with Spring Return Circuit Brochure ID: LCIRC6</p>	 <p>Spring Return One Way Circuit Brochure ID: LCIRC7</p>

****Note****

Almost any circuit can be produced on request

Studless Surrounds Types

Available in Silver, Red and Black as Standard




Large Studless
 LIW Order Code "D-Studless"
 Diameter = 40mm / Hole Size = 36mm
 Order with Lift Mounting Only



Medium Studless
 LIW Order Code "O-Studless"
 Diameter = 36mm / Hole Size = 33mm
 Order with Lift Mounting Only



Small Studless
 LIW Order Code "S-Studless"
 Diameter = 31mm / Hole Size = 28mm
 Order with Lift Mounting Only

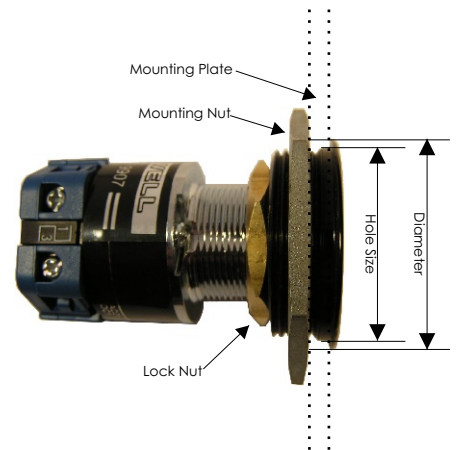

Others colours available on request: