

## *“E Series”*

### *Elevator*

High Strength  
Brass Material

High Quality  
Switch Contacts




Incorporates YA17, YA17R  
and LW3 Keyways

Lock Washer




Note: Bezel Mount Cutout  
Size = 20.5mm

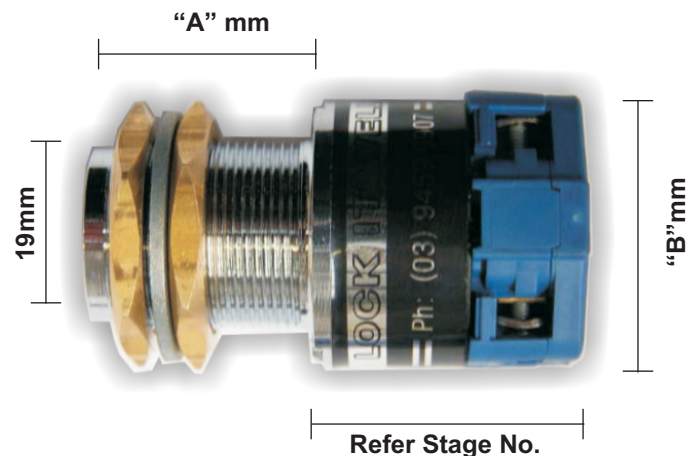

Lift Mount	“A”	Stage		“B”
		1	2	
Waffer	24mm	-	-	-
Bilock	29mm	-	-	-
Medeco	32mm	-	-	-
Digit 5 = 5	-	28mm	36mm	33mm
Digit 5 = 1,4,7	-	30mm	40mm	43mm
Digit 5 = 2	-	34mm	47mm	47mm

Note: Refer to Switch Circuits for Stage No.

Hi-tech multi  
voltage contacts




The "E" series is primarily designed for use on Lifts and elevators. It meets the strict elevator regulations and can be supplied to suit standard or unique lift key codes. Circuits to suit most lift manufactures are available off the shelf.

## How To Order

# EC325120

Digit 1  
"Removable  
Series"

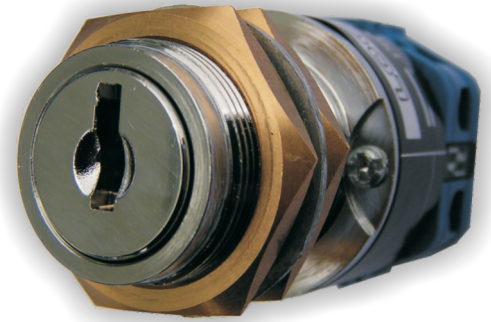

The Example shown is for a E-Series  
Wafer keyed, Lift mount,  
with key removal in 2 positions  
with a multi-voltage switch.

### Digit 2 "Lock Type"

**C** Wafer YA17, LW3  
**M** Medeco  
**Q** Bilock QCC  
**R** Wafer Reverse YA17R

### Digit 3 "Mounting"



2 Bezel



3 Lift

### Digit 4 "Key Removal"

1 Position  
2 Position  
3 Position

Spring Return=1 Position.  
If Key Captive Required  
Please Indicate Position.

### Digit 5 "Electrical Rating"

1 - High Voltage<sup>(Standard)</sup>

Silver Button Contacts  
AC21A 20Amp  
DC1 24V-20Amp

2 - High Voltage/Amps

Silver Button Contacts  
AC21A 32Amp  
DC1 24V-25Amp

4 - Low Current<sup>(Low Bounce)</sup>

Silver H-Bridge Contacts  
AC21A 12V-5Amp  
DC1 12V-3Amp

5 - Multi Volt<sup>(Standard Small)</sup>


Special Multi-Voltage Contacts  
AC21A -10Amp  
DC1 24V-6Amp

7 - PLC Data<sup>(Low Bounce)</sup>


Gold H-Bridge Contacts  
AC21A 12V-2Amp  
DC1 12V-1.5Amp

### Digit 6,7&8 "Switch Circuits"


Note: Please refer to the relevant circuit brochure attached or available online at [www.lockitwell.com.au](http://www.lockitwell.com.au) under the downloads section of the lift switches




Two Position  
Circuit Brochure ID: LCIRC4



Three Position  
Circuit Brochure ID: LCIRC5



Two Position with  
Spring Return  
Circuit Brochure ID: LCIRC6



Spring Return One Way  
Circuit Brochure ID: LCIRC7

### \*\*Note\*\*

Almost any circuit can be  
produced on request

## Studless Surrounds Types

Available in Silver, Red and Black as Standard



### Large Studless

LIW Order Code "D-Studless"  
Diameter = 40mm / Hole Size = 36mm  
Order with Lift Mounting Only




### Medium Studless

LIW Order Code "O-Studless"  
Diameter = 36mm / Hole Size = 33mm  
Order with Lift Mounting Only



### Small Studless

LIW Order Code "S-Studless"  
Diameter = 31mm / Hole Size = 28mm  
Order with Lift Mounting Only

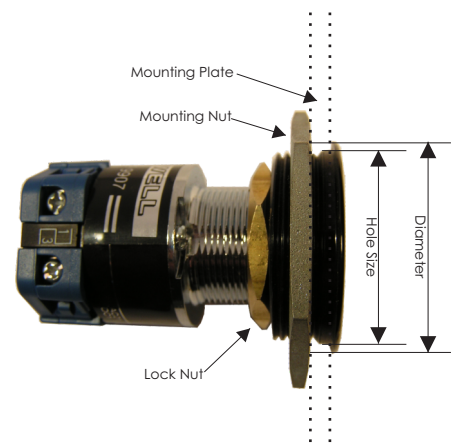

Others colours available on request: