


“Electro-Mechanical Interlock”

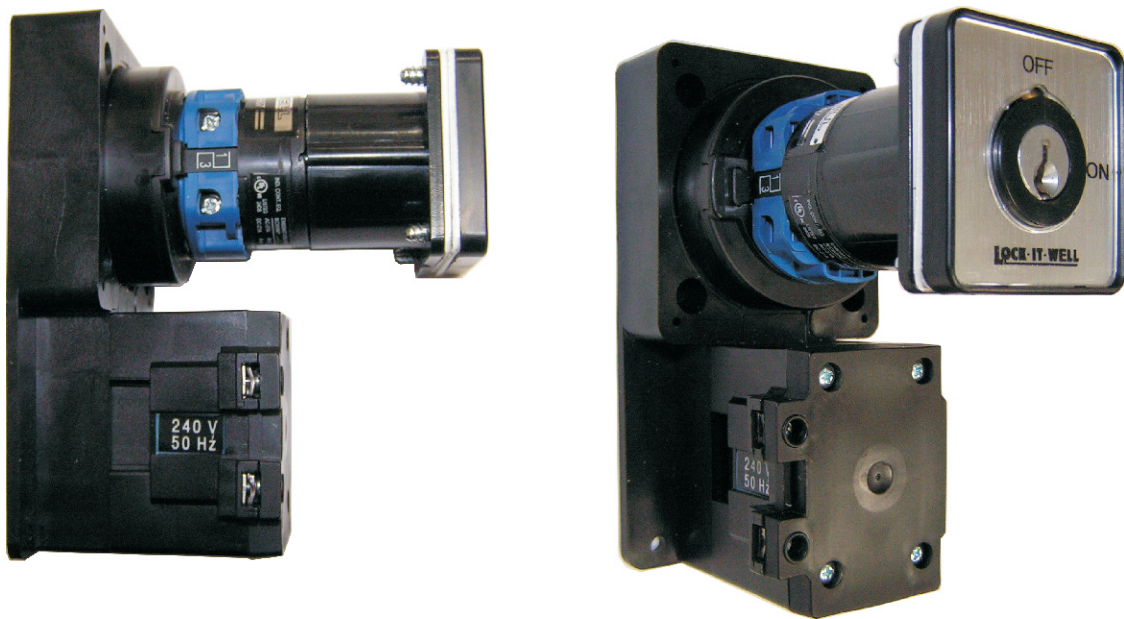

The interlock is activated by energizing or de-energizing the electrical system
Coil voltage 24v to 600v AC, 50 or 60 Hz

The electro-mechanical interlock locks the switch in any switching position. The interlock device is operated by energizing or de-energizing the electro-mechanical system. Adding auxiliary contacts to the switch permits the device to be operated in pre-determined positions.

Max. ambient temperature open: 35°C during 24 hours with peaks up to 40°C