



“Electro-Mechanical Interlock” for DC

R series Interlock

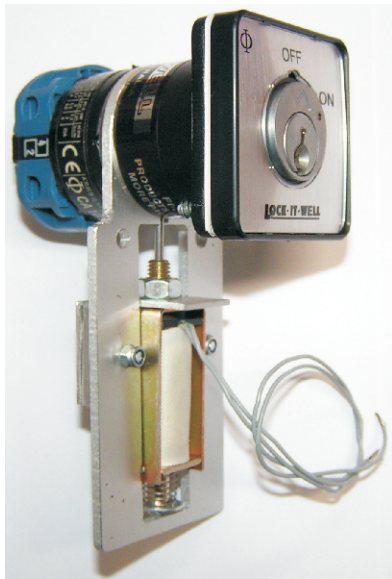

The "R" series uses a unique removable cylinder enabling convenient master keying and key recombination from the switch front only.

K series Interlock

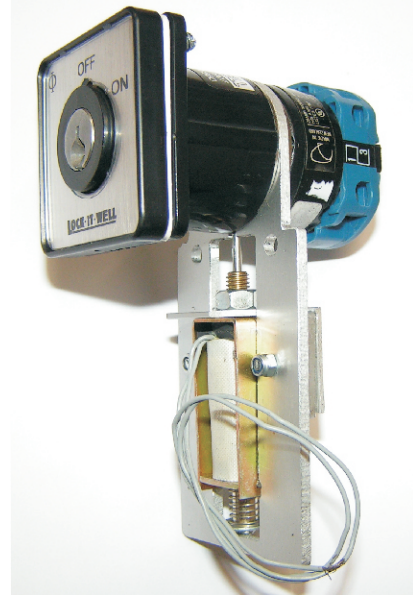

Incorporates standard 530 Key Entrance Set Lock cylinders. Supplied with four fixing points for a high strength mounting.

Coil voltage 6V to 110V DC

Power to Lock or Power to unlock

Large range of switch contacts to suit application

The electro-mechanical interlock locks the switch in any switching position. The interlock device is operated by energizing or de-energizing the electro-mechanical system. Adding auxiliary contacts to the switch permits the device to be operated in pre-determined positions.

Max. ambient temperature open: 35°C during 24 hours with peaks up to 40°C

Specialised Security Products

Patented & Registered Designs

Elect-interlockDC
2012