


LOCK-IT-WELL

34 Yale Drive, Epping, VIC 3076
Ph (03) 9408 9907 sales@lockitwell.com.au
www.lockitwell.com.au for Full Product Information


Oval Series Rain Box

Surface Mount or
Post Mount
Rain Shield
Galvanised Body
Stainless Steel Face

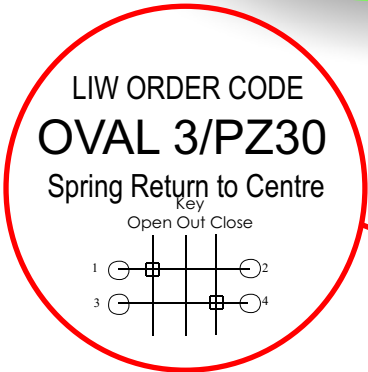


Designed to surface mount on a wall or
mount on a standard 75mm post.
Key way is shielded from the rain.

Available in other switching configurations

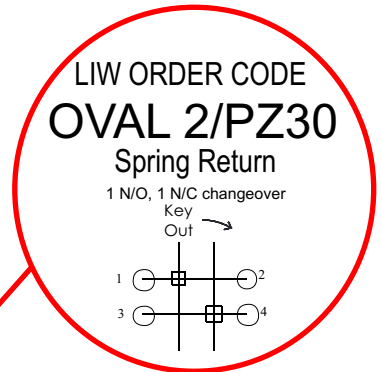


1 x 10mm
Cable Hole

4 x 4.5mm
Mounting Holes

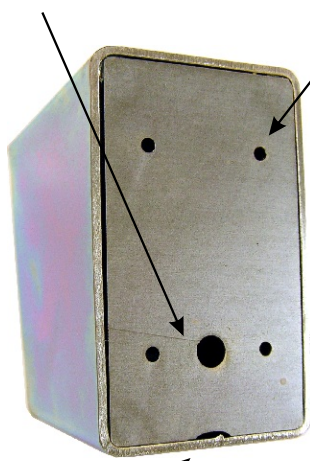

Water Drainage

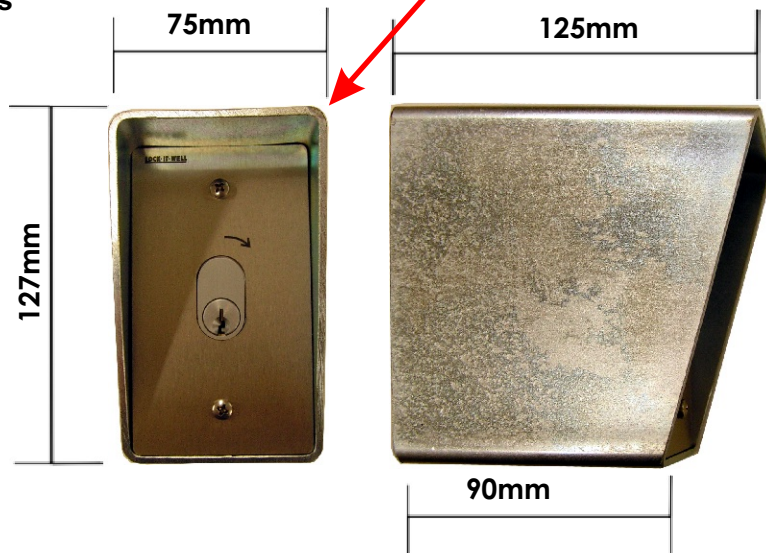

Note: This product is not a weather proof enclosure.
It is designed as a rain shield only.

The Oval series of key operated switches has been designed for durability security, easy selection and easy installation.
Four common switches are available off the shelf.

Electrical Characteristics

AC current	AC21 10 amp 440 volt	DC current	DC1 24v 10 amp
	AC23 3 KW		Inductive 24v 6 amp
	AC 3 2.2 KW		

Electronic Data:

High contact reliability by multi contacts with 1u standard gold contacts and option 35u gold plating

Circuits:

Available with multiple contacts and hundreds of contact arrangements. Finger proof terminals. Terminals take two 1.5mm wires.

Durability:

Tested for 1/2 million operations.

Locking Features

Incorporates standard Oval lock cylinders.

Cylinder easily removed and re-assembled without risk of the switch falling apart.

May be master keyed into all common lock brands and high security lock systems.


Lazy cam allows for key removal in both off and on positions (Oval 1) Captive key available (Oval 4)

Electrical isolated cylinder for added safety

OVAL 1

Lazy Cam


1 N/O, 1 N/C changeover



OVAL 2


Spring Return

1 N/O, 1 N/C changeover



OVAL 3

Spring Return to Centre



OVAL 4

Captive Key

1 N/O, 1 N/C changeover

