
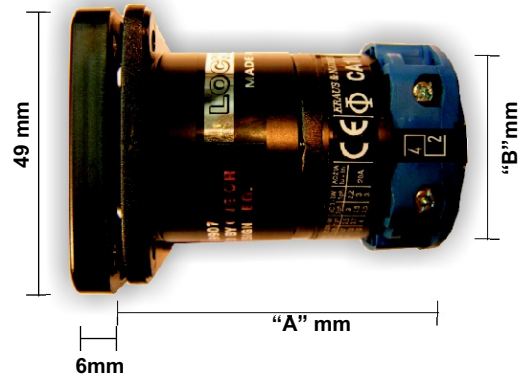


34 Yale Drive, Epping VIC 3076
Ph (03) 9408 9907 Fax (03) 9408 9920

Pty Ltd

www.lockitwell.com.au for Full Product Information

“R Series” Removal Cylinder

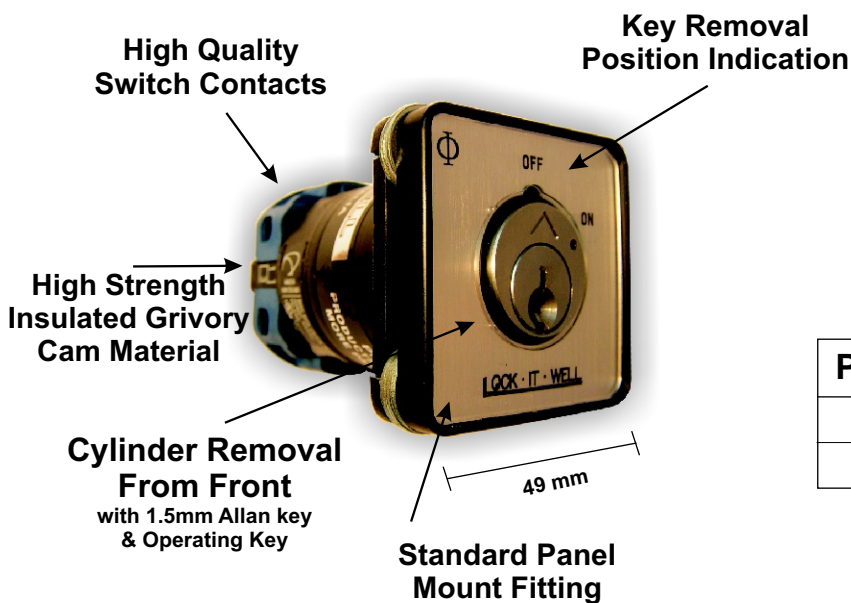

Panel Mount	“A” Stage		“B”
	1	2	
Digit 5 = 1,4,7	61mm	70mm	43mm
Digit 5 = 2	65mm	77mm	47mm

Max Material Thickness 4mm

Optional Mounting Types




Surface Mount Box
LIW Order Code “KEJB1”



Water Resistant Box
LIW Order Code “KEWP1”



Stainless Steel
LIW Order Code “PZ11”

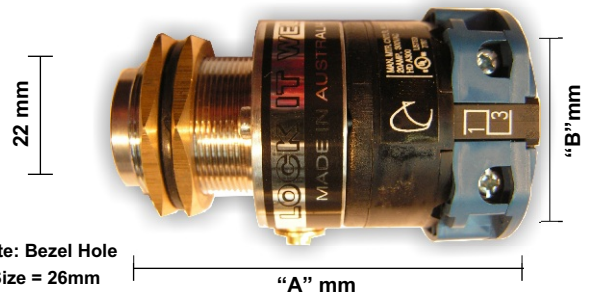

Note: Bezel Hole
Size = 26mm

Lift Mount	“A” Stage		“B”
	1	2	
Digit 5 = 1,4,7	71mm	81mm	43mm
Digit 5 = 2	75mm	88mm	47mm

Thread Max Material Thickness 22mm
Cylinder Max Material Thickness 2.5mm

The “R” series uses a unique removable cylinder enabling convenient master keying and key recombination of rental properties. The key may be removed or held captive in any switched position. This series is available in a variety of mounting types including panel, lift, bezel and wall plate. It is also available in a wide range of switching configurations.

Features

- Incorporates specialised lock cylinders for key removable in multiple positions.
- Cylinder removable from front without risk of the switch falling apart.
- May be master keyed into most common lock brands and high security lock systems.
- Electrical isolated cylinder for added safety

Specialised Security Products

Patented & Registered Designs

©copyright Lock It Well 2015

R-Series
2015

How To Order



The Example shown is for a R-Series Lockwood 6-pin inline, Panel mount, with key removal in 2 positions at 20 amp switch.

RL121003

Digit 1
"Removable Series"

Digit 2 "Lock Type"

- A Astra
- B Bilock
- D Abloy(Protec & Disklock)
- E Efcó
- G Kaba Modular
- H Kaba Gege
- K Kaba Quattro (Old Size Core)
- L Lockwood** (6-Pin Inline)
- P Binary Plus
- S Schlage
- T Lockwood Twin
- V Lockwood V7
- W Evva
- O Other

Digit 3 "Mounting"



1 Panel



2 Bezel



3 Lift

Digit 4 "Key Removal"

- 1 Position
- 2 Position
- 3 Position
- 4 Position
- 5 Position
- 6 Position


Spring Return=1 Position.
Note: Specify if Captive Positions are Required.

Digit 5 "Electrical Rating"

- 1 -Mains Voltage(Standard)
Silver Button Contacts
AC21A 20Amp
DC1 24V-20Amp
- 2 -Mains Voltage/Amps
Silver Button Contacts
AC21A 32Amp
DC1 24V-25Amp
- 4 -Low Current(Low Bounce)
Silver H-Bridge Contacts
AC21A 12V-5Amp
DC1 12V-3Amp
- 7 -PLC Data(Low Bounce)
Gold H-Bridge Contacts
AC21A 12V-2Amp
DC1 12V-1.5Amp


Digit 6,7&8 "Switch Circuits"

Note: Refer to full switch circuits for other switch configurations

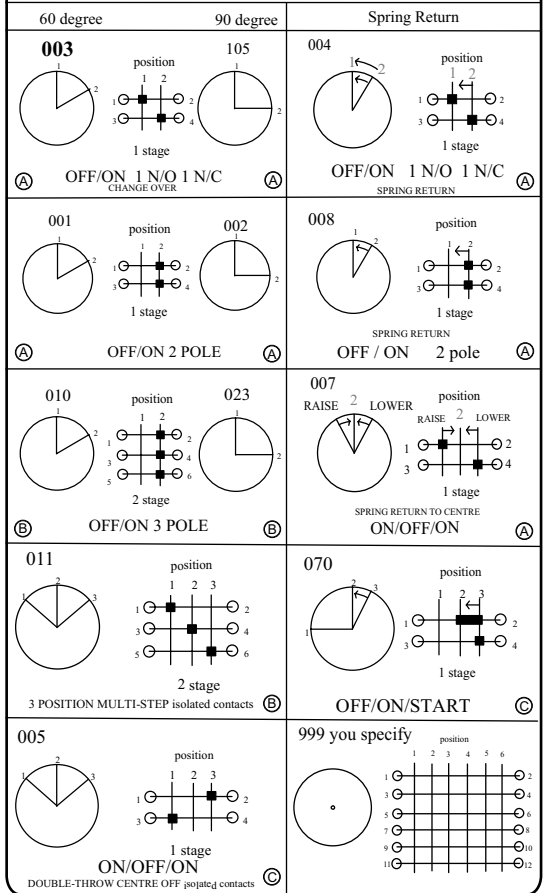

Engraving

Some switch types have common engraving. If you have special requirements Please show them in the following way at time of order.

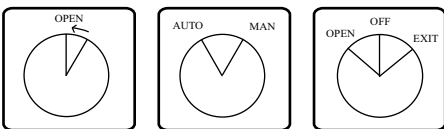


Note: Charges may apply



"R Series"
Cylinder Cam
LIW Code "PR05"

Optional Mounting Types



Surface Box Mounting
LIW Order Code "KEJB1"
100mm X 100mm X 100mm
Order with Panel Mounting Only



Water Resistant Box Mounting
LIW Order Code "KEWP1"
100mm X 100mm X 100mm
Order with Panel Mounting Only



Stainless Steel Mount
LIW Order Code "PZ11"
75mm X 115mm
Order with Panel Mounting Only



Clipsal 2000 Series Wall
LIW Order Code "EZY WALL"
75mm X 115mm
Order with Panel Mounting Only



Flush Fit - Studless
LIW Order Code "DL Studless"
Diameter = 40mm Hole Size = 36mm
Order with Lift Mounting Only